


Product Sheet

Alcuf Fencing

4', 5', 6' High Alcuf Privacy Fence with V-joint, Tongue and groove wood infill

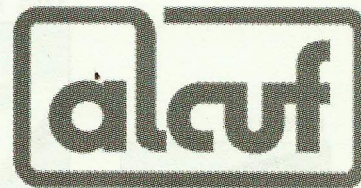

Alcuf International Inc.


5350 Canotek Rd., #20, Gloucester (Ottawa), Ontario, Canada K1J 9E2

Telephone: (613) 749-9393, 1-800-410-4756, Fax: (613) 749-5463


sales@alcuf.com




3D-View

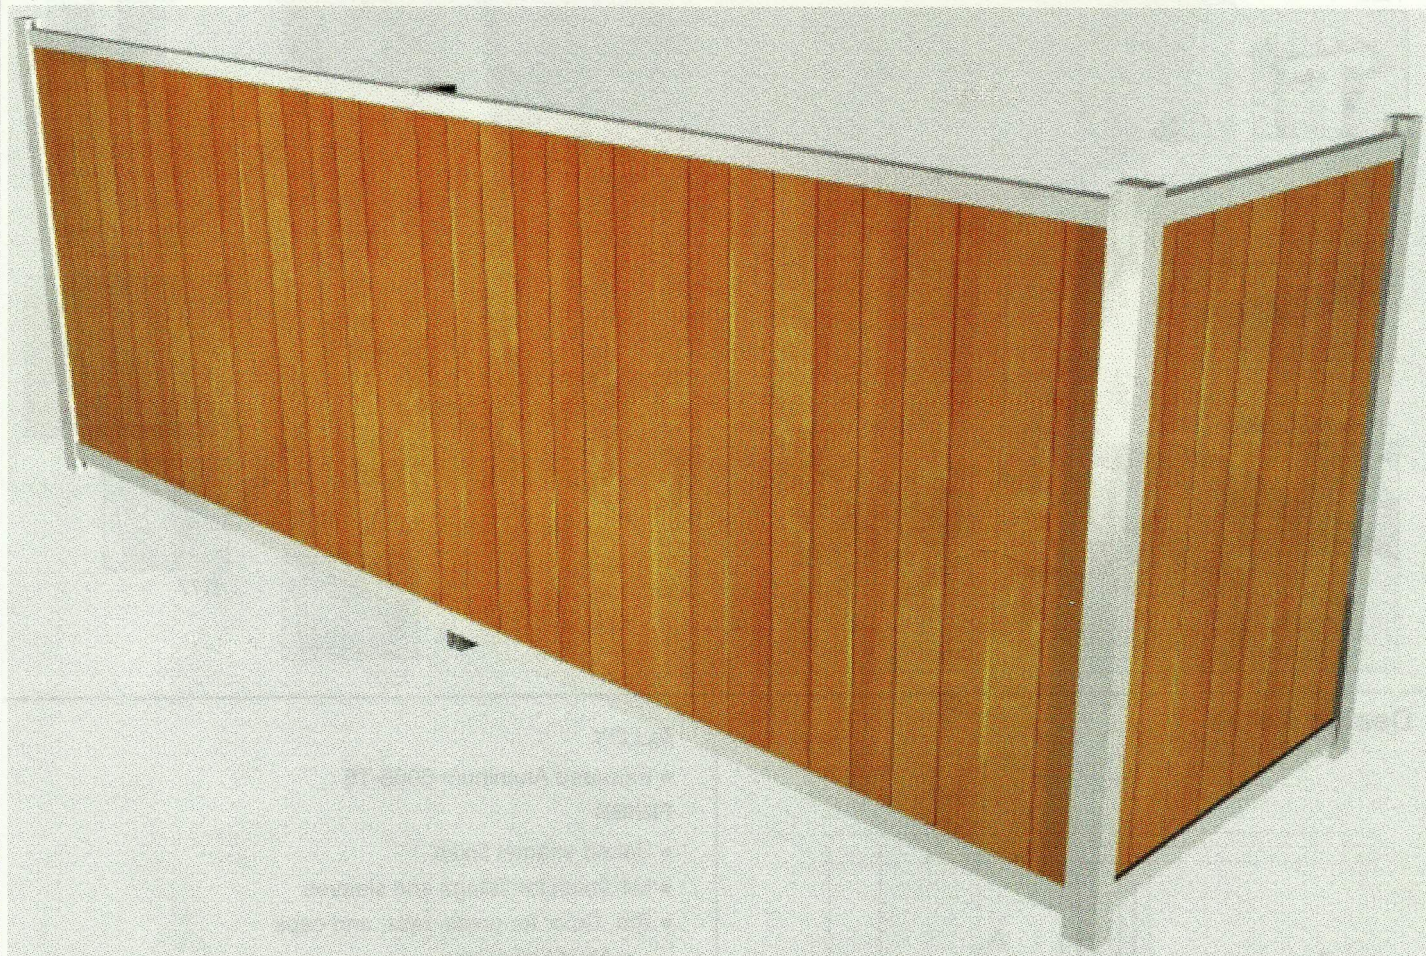


Side 1

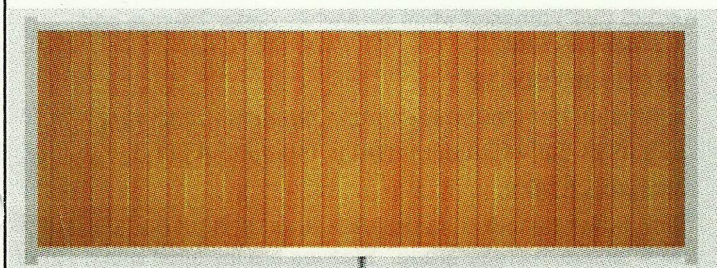


Side 2

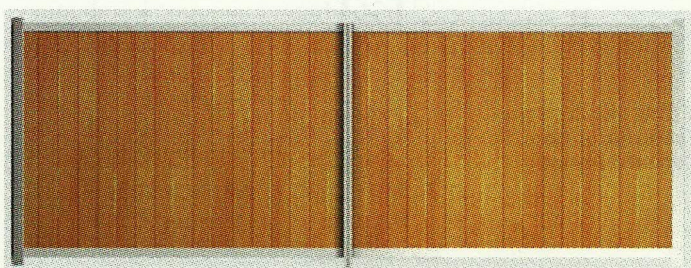

www.alcuf.com

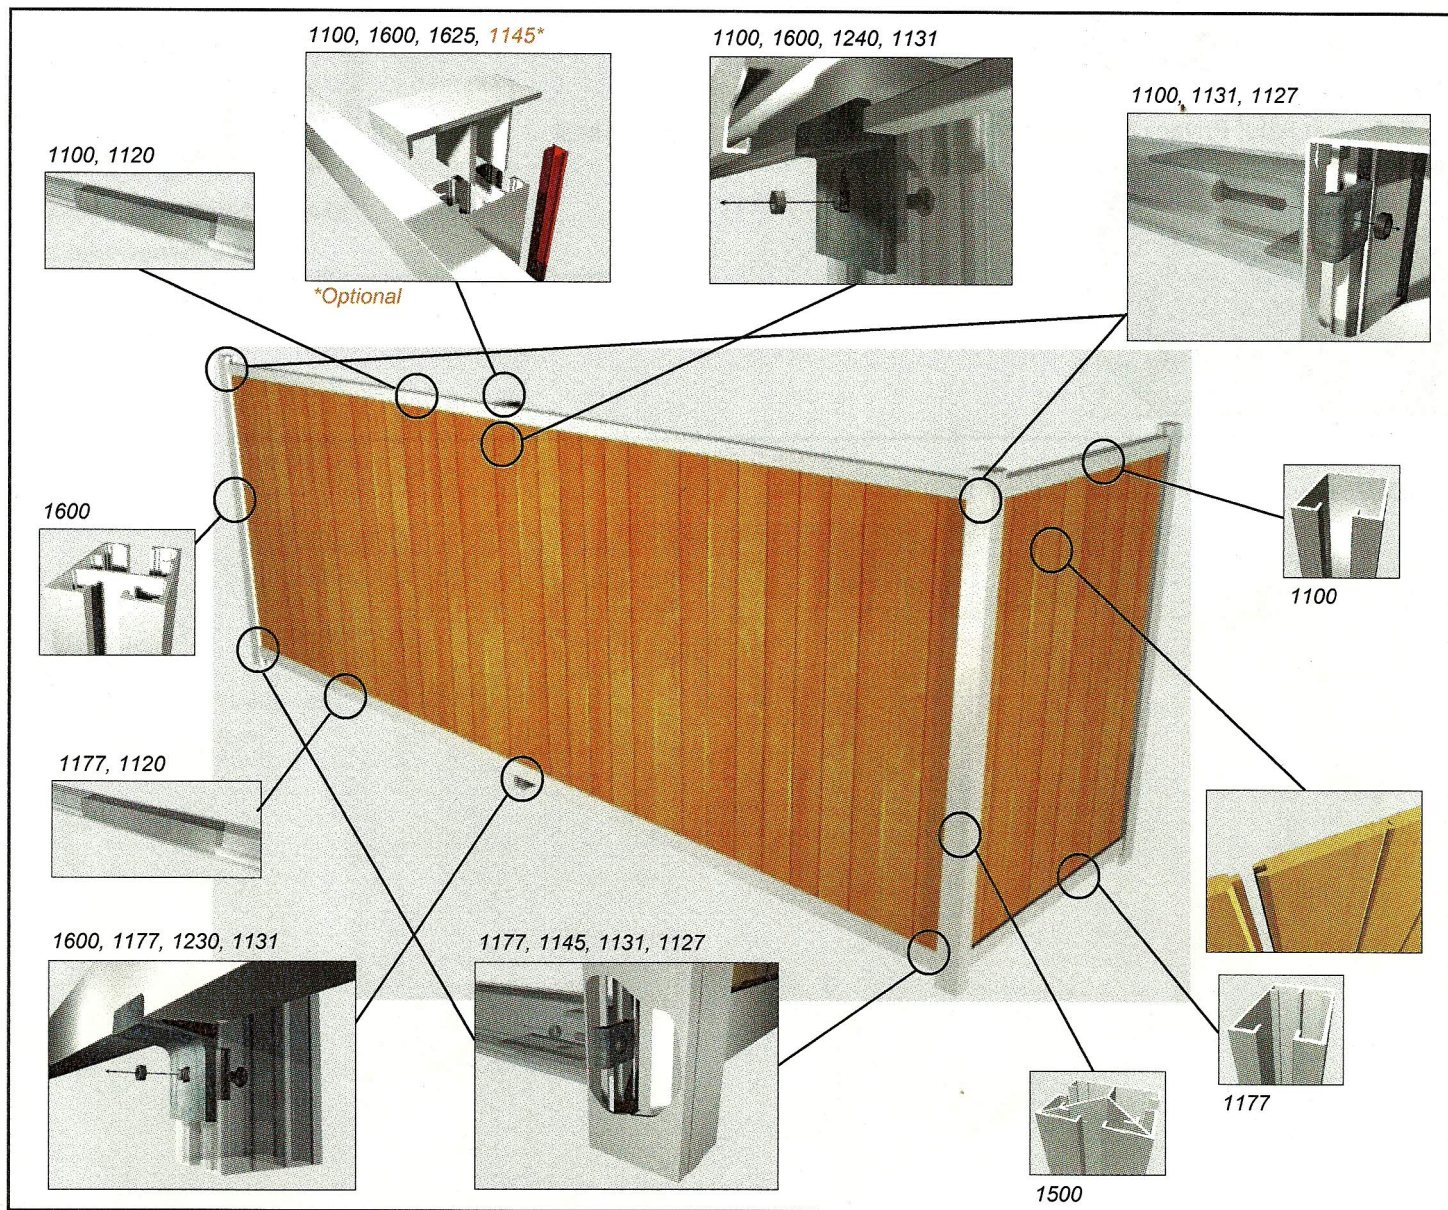

Design Notes

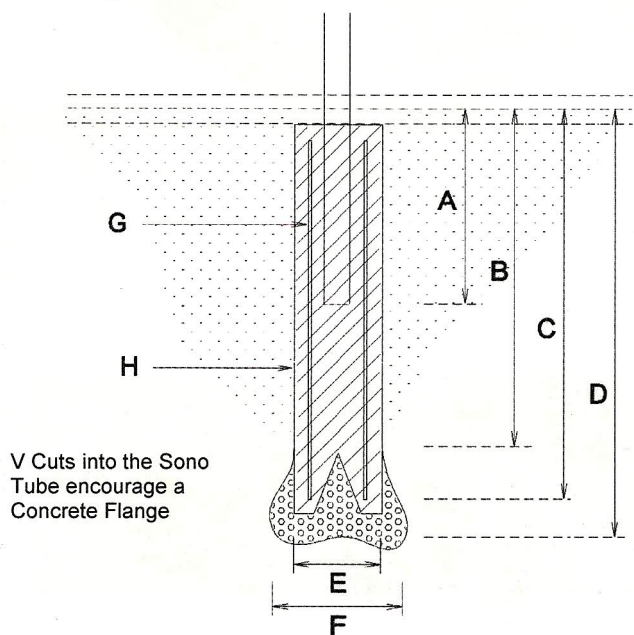

This is a typical base design for normal undisturbed soil conditions. For specific design details, consult your Geotechnical Engineer.

ALLOY

- Extruded Aluminum 6005-T5

FINISH

- Baked enamel finish
- Mill finish for fittings and sleeves
- Std. Color for posts, rails, and caps
 - Alcufl Light Gray
 - Alcufl Bronze
 - Other color available based on quantity

INFILL

- 1x6 (3/4") dressed white pine/white cedar Tongue and groove V-Joint.

NUTS AND BOLTS

- 5/16"x1 1/4" Mechanical GALV. Grade 5 -1230,1240
- 5/16"x1 1/2" Mechanical GALV. Grade 5 -1127

INSTALLATION

Installation by authorized dealers only. Bottom rail installed 2" to 4" above average grade. Sleeves are installed within 12" of line posts. See post spacing tables for the required post spacing in your area, based on your local wind conditions. Other posts sizes are available to accommodate varying conditions. It is typically preferable to use a stronger post to reduce the number of concrete bases required.